



Made in USA

# SAFE T ALERT™

**ABYC  
Required  
7/31/06**

## High Bilge Water Alarm


- **Visual and Audible Alarm Indicator.** Dual signaling before maximum bilge water conditions exist, sounds an alarm & activates warning light.
- **Marine Proven.** Exclusively designed for the harsh marine environment. Sensor has been used in bilge's for over 15 years, not effected by fuel spills or other chemicals.
- **Float Sensor.** Monitors bilge for high water. Will not false alarm from morning dew, high humidity, splashes, hose over spray or buildup of oil or contamination.
- **Microprocessor controlled.** Eliminates false alarms from rough seas, chop and vibration.
- **Test/Mute button.** Tests alarm with a push of a button. Mutes alarm while boater investigates the problem.
- **Easy installation.** Install at the helm or in the cabin.
- **Compliant with ABYC Standard H-22**

### Marine Operating Specifications

- Power 12 VAC, operational range 7-28 volts.
- 10 mA (.01 amp.) current draw allows "always on" operation.
- Alarm triggers before maximum bilge water level is reached.
- Loud 100 decibel alarm alerts boater while under way.
- Display Panel Size: 3-1/4"W x 2-3/4"H x 3/4"D.
- Meets ABYC H-22 section 22.7.3 effective 7/31/2006.



Model SA-1000XL

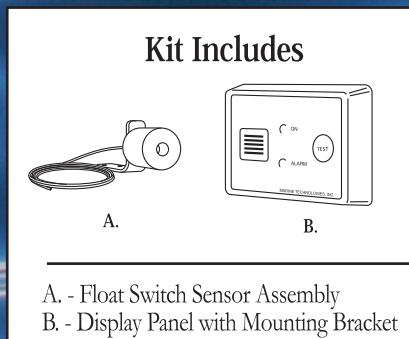

A. - Float Switch Sensor Assembly  
B. - Display Panel with Mounting Bracket

SA-100 Bilge Water Sensor  
SA-10XLR Remote Display

31632 N. Ellis #301  
Volo, IL 60073  
(800) 383-0269  
[www.SafeTAlert.com](http://www.SafeTAlert.com)