


CD Series

LCD Commercial Displays

CD Series

Displays Designed for Commercial Industries.

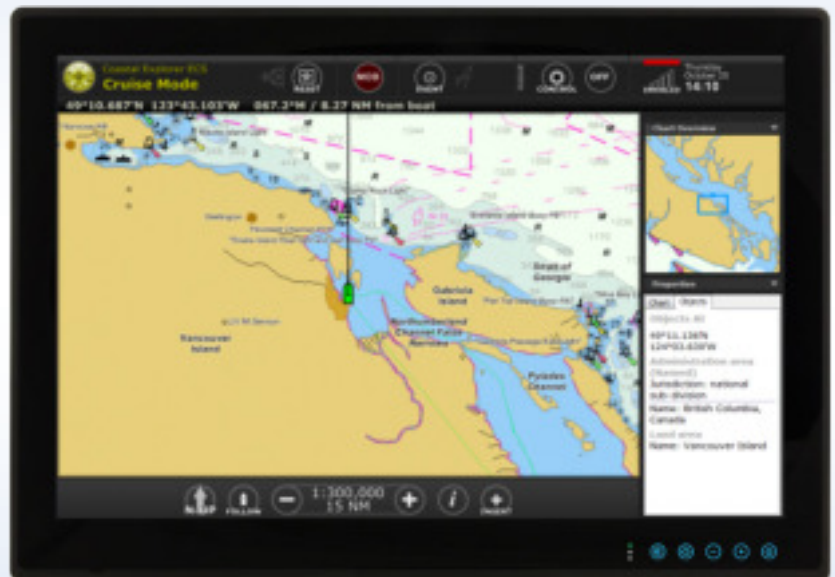

- 19" (1280x1040), 24" (1920x1080) and 26" (1920x1200) Commercial Displays With Projective Capacitive Multi-Touch Screen
- Color Calibrated For Ecdis Compliance (Optional)
- Capacitive Touch Keys For Quick Function Access and Display Control (Support Ecdis Day, Dusk, and Night Mode Switching)
- Meets The Requirements Of Industrial Marine Standards, Including IEC60945 4th Edition, DNVGL-CG-0339, IACS E10



Seatronx Commercial Displays

Marine ECDIS Displays	CD-19T	CD-24T	CD-26T
FEATURE			
Diagonal (active area) Inch	19	24	26
Native Resolution (Pixels)	1280 x1024	1920 x 1080	1920 x 1200
Colors	16.7M	16.7M	16.7M
Contrast Ratio	1200:1	5000:1	1500:1
Brightness	350	350	350
Viewing Angle (left, right)	89, 89	89, 89	89, 89
Viewing Angle (up, down)	89, 89	89, 89	89, 89
Backlight Dimming	-0 (3 Stage ECDIS Option)	-0 (3 Stage ECDIS Option)	-0 (3 Stage ECDIS Option)
Inputs	1 x VGA, 1 x DVD-D, 1 x HDMI 2.0, 1 x HDMI 1.4, 1 x Display Port 1.2	2 x VGA, 1 x DVD-D, 1 x HDMI 2.0, 1 x HDMI 1.4, 1 x Display Port 1.2	3 x VGA, 1 x DVD-D, 1 x HDMI 2.0, 1 x HDMI 1.4, 1 x Display Port 1.2
Remote Control	RS232	RS232	RS232
USB For Touch Screen	YES	YES	YES
Speaker	2x 2W Speaker	2x 2W Speaker	2x 2W Speaker
Buzzer	75 dB~80 dB, 230 Hz, 1m	76 dB~80 dB, 230 Hz, 1m	77 dB~80 dB, 230 Hz, 1m
Power	9-36VDC Isolated power supply 60W (Max)	9-36VDC Isolated power supply 70W (Max)	9-36VDC Isolated power supply 80W (Max)
Power on/off dimming control	Front Bezel	Front Bezel	Front Bezel
Projected Capacitive touch	YES	YES	YES
ECDIS Color Calibration	Optional	Optional	Optional
Mounting	Panel Mount , Vesa Mount	Panel Mount , Vesa Mount	Panel Mount , Vesa Mount
Dimensions	429mm X 392mm X 72.8mm 16.889 X 15.433 X 2.866	595mm X 385mm X 63.8mm 23.43 X 15.16 X 2.51	621mm X 432.4mm X 85.5 24.44 X 17.02 X 3.66
Cutout	408mm X 359mm 16.03 X 14.13	572mm x 363mm 22.51 X 14.29	598mm X 408mm 23.54 X 16.06
IP Rating	IP65 Front	IP65 Front	IP65 Front
IEC60945, DNV, IACS E10, CE,FCC	YES	YES	YES
Operating Temperature	-15 to 55 c	-15 to 55 c	-15 to 55 c



Our Vision is Your Vision

SEATRONX, LLC
 PO Box 1713 • Hobe Sound Fl 33475
 (772) 418-5035 • info@seatronx.com
www.seatronx.com