

LED Underwater Lights

LIGHTARMOR™ LED Underwater Lights

Introducing LightArmor™ Underwater Lights from Attwood, a new line of premium surface-mount LED lights that are engineered to be the brightest and most durable lights in the industry. Like all LightArmor™ products, they're technically advanced, built to perform in the harshest marine environments, and backed by an industry-leading 5-year warranty.

- 12V and 24V DC systems
- Intelligently engineered for strength and durability
- Exclusive Heat-Sync Cooling System with Active Overheat Protection
- Resistant to corrosion, chemicals, and UV damage
- Extreme impact-resistant lens
- 3 ft. sheathed wire
- Reverse polarity protection
- Fully-sealed waterproof electronics
- Simple installation with minimal mounting hardware
- Low-profile design
- Electro-polished 316 stainless steel cover (Optional for OEM)
- CE certified



Three popular sizes - 4", 5", 6"


Three vibrant colors - Sapphire Blue, Intense White, Tactical Green

Two performance levels - High Performance (HP), Extreme High Performance (HPX)

Note: All Light Armor Underwater lights MUST BE MOUNTED UNDER WATER LINE. Only work underwater.

Outshining the Competition.

LIGHTARMOR™ Underwater Lights are the brightest on the market.

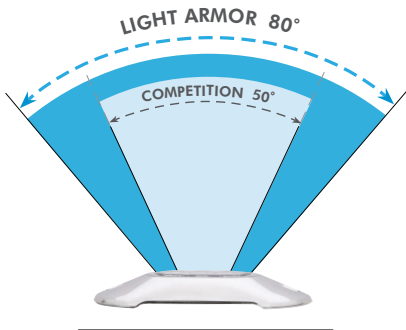

Projection Intensity vs. Competitor

- Resistant to corrosion, chemicals, and UV damage
- Simple installation with minimal mounting hardware
- Extreme impact-resistant lens
- Low-profile design
- 3' sheathed wire
- Heat sink cooling system with active overheat protection
- Reverse polarity protection
- Fully-sealed waterproof electronics
- Electro-polished 316 stainless steel cover (included in retail packaging; installation optional)

LIGHTARMOR™ LED Underwater Lights

NOTE: Bulk packaging **does not** include covers and aftermarket packaging does include covers.



Sapphire Blue
65UW03B




Tactical Green
65UW03G



Intense White
65UW03W

Description	Color	Fixture Lumens*	Current Draw at 13.6V	Current Draw at 24V	OEM Part #	Part #
High Performance (HP)						
4.0 HP - 4" length, 3 LED	Sapphire Blue	800	0.32	0.16	65UW03B-1	65UW03B-7
	Tactical Green		0.36	0.18	65UW03G-1	65UW03G-7
	Intense White		0.64	0.32	65UW03W-1	65UW03W-7
5.0 HP - 5" length, 6 LED	Sapphire Blue	1,350	0.66	0.33	65UW06B-1	65UW06B-7
	Tactical Green		0.71	0.36	65UW06G-1	65UW06G-7
	Intense White		1.26	0.63	65UW06W-1	65UW06W-7
6.0 HP - 6" length, 12 LED	Sapphire Blue	1,650	1.32	0.66	65UW12B-1	65UW12B-7
	Intense White		2.52	1.26	65UW12W-1	65UW12W-7
Extreme High Performance (HPX)						
4.0 HPX - 4" length, 3 LED	Sapphire Blue	1,350	0.64	0.32	—	66UW03B-7
5.0 HPX - 5" length, 6 LED	Sapphire Blue	2,750	1.30	0.65	66UW06B-1	66UW06B-7
	Tactical Green		1.40	0.70	66UW06G-1	—
	Intense White		2.46	1.23	66UW06W-1	—
6.0 HPX - 6" length, 12 LED	Sapphire Blue	5,000	2.59	1.30	66UW12B-1	66UW12B-7
	Intense White		4.50	2.25	66UW12W-1	66UW12W-7
Optional Covers - For OEM only (Aftermarket packaged product includes 316 Stainless Steel Cover)						
4.0 HP/HPX Cover	Stainless Steel				65UW03CVSS-1	—
5.0 HP/HPX Cover	Stainless Steel				65UW06CVSS-1	—
6.0 HP/HPX Cover	Stainless Steel				65UW12CVSS-1	—

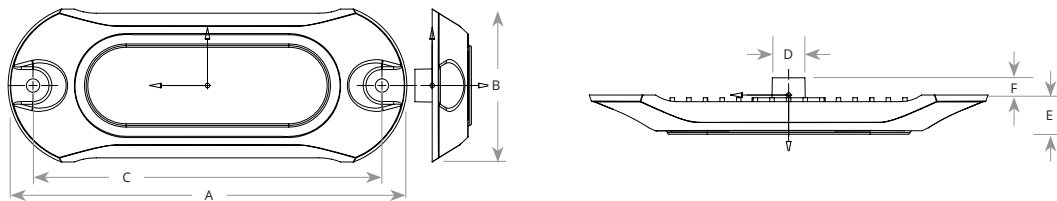

Dimensions

Model	Length (A)	Width (B)	Distance Between Mounting Holes (C)	Diameter of Wiring Hold (D)	Installed Product Height (E)	Wire Colar Depth (F)
4.0 HP	4.00"	2.15"	3.25"	.56"	.56"	.30"
4.0 HPX	4.00"	2.15"	3.25"	.56"	.56"	.30"
5.0 HP	5.00"	2.15"	4.25"	.56"	.56"	.30"
5.0 HPX	5.00"	2.15"	4.25"	.56"	.56"	.30"
6.0 HP	6.00"	2.35"	5.25"	.56"	.56"	.30"
6.0 HPX	6.00"	2.35"	5.25"	.56"	.56"	.30"